

Step 1: Open the clamp




Step 2: Loosen the two screws and take up the springs



Step 3: Take up the block




Step 4: Take away the plastic block

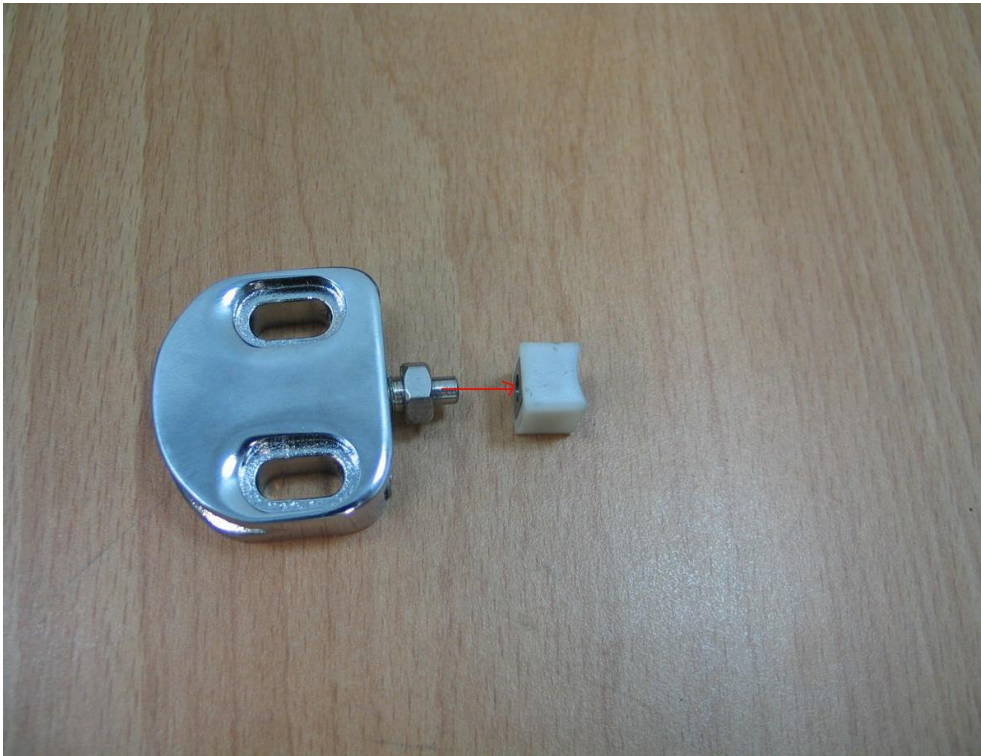

Step 5: For putting the block back, release the two screws first



Step 6: Lock the screws, and put the springs back. Don't overtighten these,

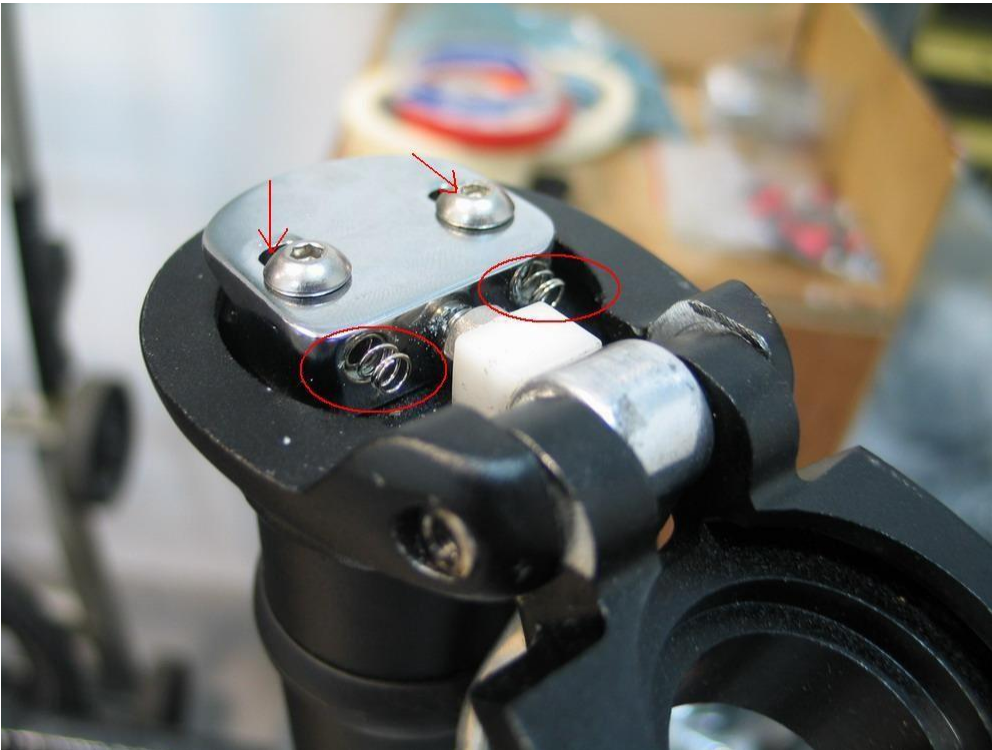

as the plate needs to be able to slide.

Step 7: Lock the screws back.

